



GTL-AR-112 Series [PLAT,UVSB]



PLAT Mount

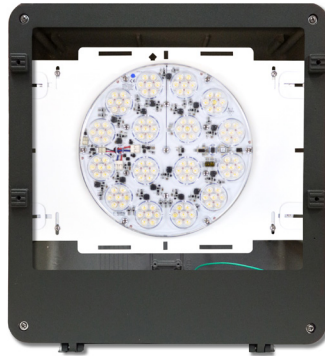

UVSB Mount

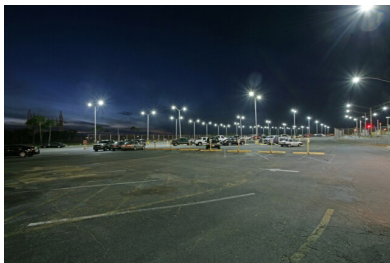

Description and Application:

Retrofit Kits for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires

Mounting Options:

- PLAT = Custom Plate
- UVSB = Universal Mounting Plate

Driver Voltage/Wattage:

- 120-277vAC 100w input / 24vDC Output
- ML: 180W Nominal

Additional Information:

Warranty:
Solstice Light Engine: 10yrs
Driver: 5yrs

LED and Optical Assembly:
Structured LED Clusters for
Optimized Distribution

L70 > 100,000Hrs.

Surge Protector:
- Recommended for all outdoor
applications

TM21 - L70 > 60,000

Ordering Code Example:

GTR-AR - 112 - ML - SV - BR - NL - PLAT

GTR-AR	-	112	-	ML	-	SV	-	BR	-	NL	-	
Fixture		Wattage		Color Temp		Optics		Mounting Method				
Fixture	LED Model #	Wattage Output	Diver Input Voltage	Kelvin	Optics	Mounting Method						
GTR-AR	112	ML = (180W)	SV = 120-277V	BR = 5000K (80CRI)	NL = No Lens	PLAT UVSB						



Fully Compliant with ARRA Buy American Requirements. Made in the USA.