

# M-21 Wall Pack Fixture SM362


GTL-WP-SM362-M21-G2

## 25W - 55W

Commonly Replaces  
50W-175W HPS/MH/HID

### Description:

Ideal for building, back yards, parks, signs, sports field, parking lots and other general applications where floodlighting may come into use. Heavy duty die-cast aluminum. Heat and impact resistant tempered glass lens. Dark architectural bronze color. Powder coated finish on the heavy duty die cast housing. Silicone rubber included to prevent any leakage from the outside.

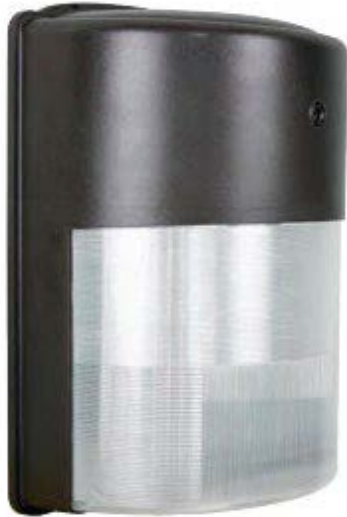

 **Made in USA**  
Buy American Act compliant

 **L70 > 150,000**  
Third Party Tested

 **Rated IP67**  
Optional

 **Dimming Capable**  
Optional

 **RoHS compliant**  
Materials

 **UL Listed**  
US and Canada



**IES Files**  
Available at  
[globaltechled.com](http://globaltechled.com)

### Additional Information:

- Solstice LED Engine's Life Sync Programs: Lumen Depreciation Maintenance, Temperature Control, Under Voltage Lockout, and Optional 5-6-1 Energy Savings Program
- Patented Active Cooling and Vortex Heat Sink
- Soft Start
- Plug and Play wireless control transceiver, IoT compatible (optional)
- LED Chips operating up to 1100mA
- Smart Driver: SV and HV, IP66 Rated, IEC, UL class 2 power, Class A sound rating, minimum efficiency of 86%, and operates between -40°C and 50°C, 120-480V, 50Hz

### Limited Warranty:


- 10 Year Engine Warranty
- 5 Year Driver Warranty

### Applications:

- Wall Pack
- Area


| Output | Wattage | Lumens | Efficacy (L/W) |
|--------|---------|--------|----------------|
| HI     | 55      | 6000   | 110            |
| MH     | 45      | 5000   | 115            |
| ML     | 35      | 4000   | 120            |
| LO     | 25      | 3000   | 120            |

| Specifications          |  |                          |   |
|-------------------------|--|--------------------------|---|
| <b>Voltage Options:</b> | SV (120V-277V)<br>HV (277V-480V)               | <b>CCT:</b>              | BR 5000K, YW 4100K, BL 4000K, RD 3500K, PR 3000K, OR 2700K, AMB 597nm   |
| <b>Operating Temp:</b>  | -40° to 45° Celsius                            |                          |   |
| <b>Power Factor:</b>    | >.90   |                          |   |
| <b>THD:</b>             | <20%   | <b>Surge Protection:</b> | Required for ALL 347V-480V applications in order to qualify for warranty. Recommended for outdoor applications. |
| <b>CRI:</b>             | 80 (standard)                                  |                          |   |
| <b>Optics:</b>          | NL (no lens), 10D, 25D, 50D, 75D, 360s, T2, T3 |                          |   |

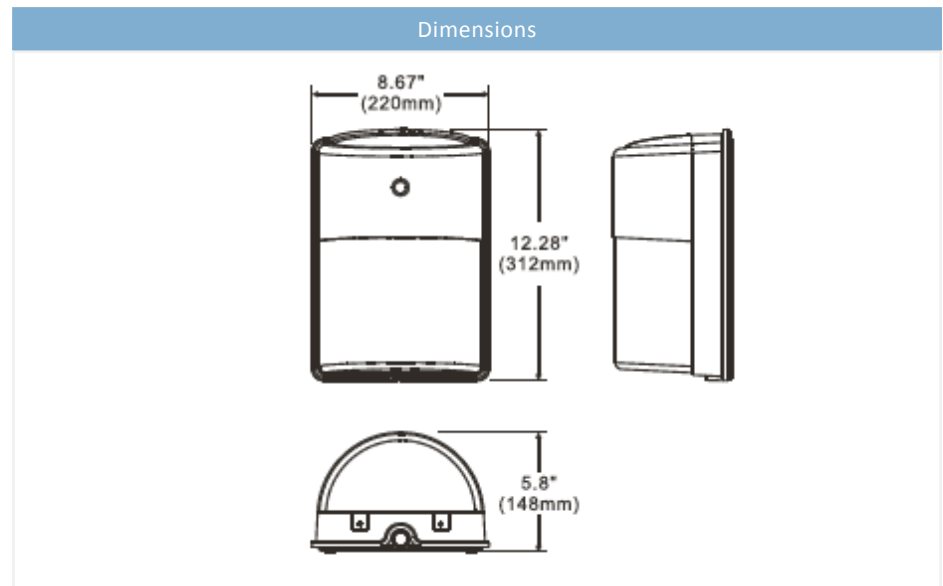

## Ordering Information:

GTL-WP-SM362 - M21 - G2 - HO - SV - BR - NL /



| Fixture      | Engine   | Wattage  | Voltage        |  | CCT                             | Lens                   | Accs             |  |
|--------------|----------|----------|----------------|--|---------------------------------|------------------------|------------------|--|
| GTL-WP-SM362 | M21 - G2 | HI (55W) | SV (120V-277V) |  | BR <sup>1</sup> (5000K) [80CRI] | NL = No Lens           | GT-LSP-120       |  |
|              |          |          | HV (277V-480V) |  | YW (4100K) [70CRI]              | 10D = 10D Lens         | GT-LSP-240       |  |
|              | M21 - G2 | MH (45W) | SV (120V-277V) |  | BL <sup>1</sup> (4000K) [80CRI] | 25D = 25D Lens         | GT-LSP-277       |  |
|              |          |          | HV (277V-480V) |  | RD (3500K) [80CRI]              | 50D = 50D Lens         | GT-LSP-347       |  |
|              | M21 - G2 | ML (35W) | SV (120V-277V) |  | PR (3000K) [95CRI]              | 75D = 75D Lens         | GT-LSP-480       |  |
|              |          |          | HV (277V-480V) |  | OR (2700K) [80CRI]              | 360s = 360 Square Lens | IP67 = 1xM21-G2* |  |
|              | M21 - G2 | LO (25W) | SV (120V-277V) |  | AMB (Amber) <sup>†</sup>        | T2 = Type II Lens      | E-PHC-0305-G     |  |
|              |          |          | HV (277V-480V) |  |                                 | T3 = Type III Lens     |                  |  |

| Surge Protectors |  |
|------------------|--|
| GT-LSP-120       | Surge Protector. 120 V 10 kA Parallel. 20kA maximum discharge current. |
| GT-LSP-240       | Surge Protector. 240 V 10 kA Parallel. 20kA maximum discharge current. |
| GT-LSP-277       | Surge Protector. 277 V 10 kA Parallel. 20kA maximum discharge current. |
| GT-LSP-347       | Surge Protector. 347 V 10 kA Parallel. 20kA maximum discharge current. |
| GT-LSP-480       | Surge Protector. 480 V 10 kA Parallel. 20kA maximum discharge current. |

## Notes:

<sup>1</sup> Lead times for CCT options other than BR and BL may be increased

\* IP67 upgrade for Engine + fan (only NL, 10D, 25D, 50D & 75D)