

112-G2 Universal High Bay Kit

GTSOL112-G2-UVHB

125W - 340W

Commonly Replaces
750W-1000W HPS/MH/HID

Description:

Universal Plates are an innovative solution that solves most retrofit issues regarding fitting and the need for a custom plate design. The universal high bay kit comes with one Engine, driver, plate, and four adjustable arms.

 **Made in USA**
Buy American Act compliant


 **L70 > 150,000**
Third Party Tested

 **Rated IP67**
Optional

 **Dimming Capable**
Optional

 **RoHS compliant**
Materials

 **UL Listed**
US and Canada

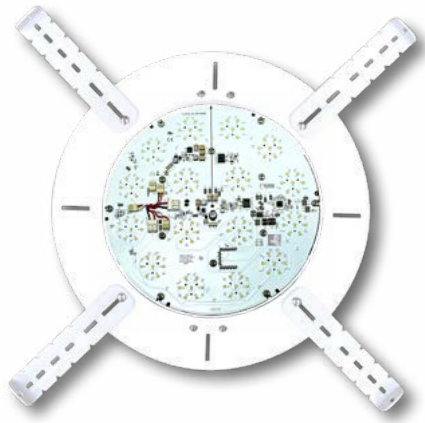

IES Files
Available at
globaltechled.com

Additional Information:

- Solstice LED Engine's Life Sync Programs: Lumen Depreciation Maintenance, Temperature Control, Under Voltage Lockout, and Optional 5-6-1 Energy Savings Program
- Patented Active Cooling and Vortex Heat Sink
- Soft Start
- Plug and Play wireless control transceiver, IoT compatible (optional)
- LED Chips operating up to 1100mA
- Smart Driver: SV and HV, IP66 Rated, IEC, UL class 2 power, Class A sound rating, minimum efficiency of 86%, and operates between -40°C and 50°C, 120-480V, 50Hz

Limited Warranty:


- 10 Year Engine Warranty
- 5 Year Driver Warranty

Applications:

- High Bay

Output	Wattage	Lumens	Efficacy (L/W)
HO	340	39000	120
HI	300	35000	120
MH	240	31000	130
ML	200	26000	130
LO	125	15000	125

Specifications			
Voltage Options:	SV (120V-277V) HV (277V-480V)	CCT:	BR 5000K, YW 4100K, BL 4000K, RD 3500K, PR 3000K, OR 2700K, GRO 460nm & 640nm, AMB 597nm, AQU 467nm 57000K, RYB 467nm
Operating Temp:	-40° to 50° Celsius	Surge Protection:	Required for ALL 347V-480V applications in order to qualify for warranty. Recommended for outdoor applications.
Power Factor:	>.90		
THD:	<20%		
CRI:	80 (standard)		
Optics:	NL (no lens), 10D, 25D, 50D, 75D, 360s, T2, T3		

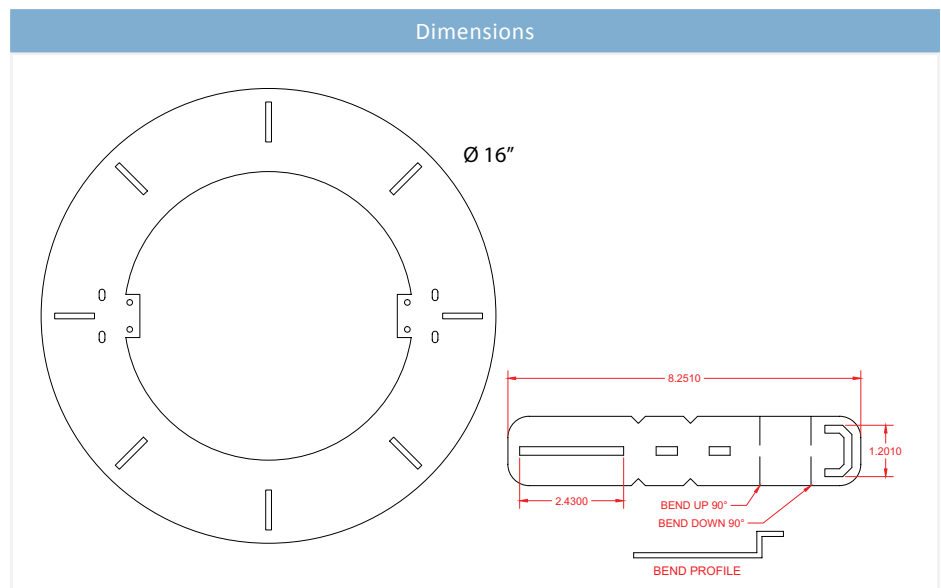


Ordering Information:

GTR - HB - 112 - G2 - HI - SV - GR - 360s - UVHB / GT-LSP-347

Retrofit	Category	Engine	Wattage	Voltage		CCT	Lens	Mounting Method	Accs	
GTR	HB = High Bay	112 - G2	HO (340W)	SV (120V-277V)		BR ¹ (5000K) [80CRI]	NL = No Lens	UVHB = Universal High Bay	IP67 = 112 - G2*	
				HV (277V-480V)		YW (4100K) [70CRI]	10D = 10D Lens		GT-LSP-120	
		112 - G2	HI (300W)	SV (120V-277V)		BL ¹ (4000K) [80CRI]	25D = 25D Lens		GT-LSP-240	
				HV (277V-480V)		RD (3500K) [80CRI]	50D = 50D Lens	GT-LSP-277		
		112 - G2	MH (240W)	SV (120V-277V)		PR (3000K) [95CRI]	75D = 75D Lens		GT-LSP-347	
				HV (277V-480V)		OR (2700K) [80CRI]	360s = 360 Square Lens	GT-LSP-480		
		112 - G2	ML (200W)	SV (120V-277V)		GRO (Grow) [†]	T2 = Type II Lens			
				HV (277V-480V)			T3 = Type III Lens			
		112 - G2	LO (125W)	SV (120V-277V)						
				HV (277V-480V)						

Surge Protectors	
GT-LSP-120	Surge Protector. 120 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-240	Surge Protector. 240 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-277	Surge Protector. 277 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-347	Surge Protector. 347 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-480	Surge Protector. 480 V 10 kA Parallel. 20kA maximum discharge current.

Accessories	
 IP67	

Notes:

¹ Lead times for 6000K options are 10-12 weeks. [†] Lead times for 6000K options are 10-12 weeks.