

2x5498-G2 Universal Shoe Box Kit

GTSOL2x5498-G2-UVSB

150W - 240W

Commonly Replaces
400W-750W HPS/MH/HID

Description:

Universal Plates are an innovative solution that solves most retrofit issues regarding fitting and the need for a custom plate design. The universal shoe box kit comes with two Engines, driver, plate, and four adjustable arms.



Minimum Fixture Dimensions:
19" x 13"

Maximum Fixture Dimensions:
32" x 26"



IES Files
Available at
globaltechled.com

Additional Information:

- Solstice LED Engine's Life Sync Programs: Lumen Depreciation Maintenance, Temperature Control, Under Voltage Lockout, and Optional 5-6-1 Energy Savings Program
- Patented Active Cooling and Vortex Heat Sink
- Soft Start
- Plug and Play wireless control transceiver, IoT compatible (optional)
- LED Chips operating up to 1100mA
- Smart Driver: SV and HV, IP66 Rated, IEC, UL class 2 power, Class A sound rating, minimum efficiency of 86%, and operates between -40°C and 50°C, 120-480V, 50Hz

Limited Warranty:

- 10 Year Engine Warranty
- 5 Year Driver Warranty

Applications:

- Area
- Roadway
- Parking

Made in USA
Buy American Act compliant

L70 > 150,000
Third Party Tested

Rated IP67
Optional


Dimming Capable
Optional

RoHS compliant
Materials

UL Listed
US and Canada

Output	Wattage	Lumens	Efficacy (L/W)
HO	240	26000	110
HI	190	22000	115
MH	170	20000	120
ML	150	18000	120

Specifications			
Voltage Options:	SV (120V-277V) HV (277V-480V)	CCT:	BR 5000K, YW 4100K, BL 4000K, RD 3500K, PR 3000K, OR 2700K, GRO 460nm & 640nm, AMB 597nm, AQU 467nm 57000K, RYB 467nm
Operating Temp:	-40° to 50° Celsius		
Power Factor:	>.90		
THD:	<20%	Surge Protection:	Required for ALL 347V-480V applications in order to qualify for warranty. Recommended for outdoor applications.
CRI:	80 (standard)		
Optics:	NL (no lens), 10D, 25D, 50D, 75D, 360s, T2, T3		

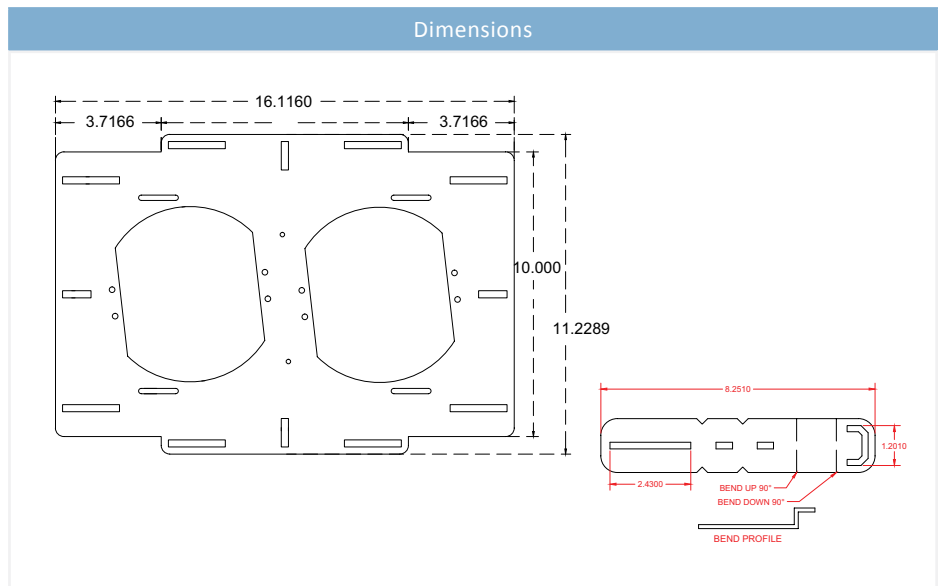


Ordering Information:

GTR - AR - 2x5498 - G2 - HI - SV - BL - NL - UVSB / GT-LSP-480

Retrofit	Category	Engine	Wattage	Voltage		CCT	Lens	Mounting Method	Accs	
GTR	AR = Area/Roadway	2x5498 - G2	HO (240W)	SV (120V-277V)		BR ¹ (5000K) [80CRI]	NL = No Lens	UVSB = Universal Shoe Box	IP67 = 2x5498 - G2*	
				HV (277V-480V)		YW (4100K) [70CRI]	10D = 10D Lens		GT-LSP-120	
		2x5498 - G2	HI (190W)	SV (120V-277V)		BL ¹ (4000K) [80CRI]	25D = 25D Lens			GT-LSP-240
				HV (277V-480V)		RD (3500K) [80CRI]	50D = 50D Lens		GT-LSP-277	
		2x5498 - G2	MH (170W)	SV (120V-277V)		PR (3000K) [95CRI]	75D = 75D Lens			GT-LSP-347
				HV (277V-480V)		OR (2700K) [80CRI]	360s = 360 Square Lens		GT-LSP-480	
		2x5498 - G2	ML (150W)	SV (120V-277V)		GRO (Grow) [†]	T2 = Type II Lens			
				HV (277V-480V)		AMB (Amber) [†]	T3 = Type III Lens			
						AQU (Aquarium) [†]				
						RYB (Royal Blue) [†]				

Surge Protectors	
GT-LSP-120	Surge Protector. 120 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-240	Surge Protector. 240 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-277	Surge Protector. 277 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-347	Surge Protector. 347 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-480	Surge Protector. 480 V 10 kA Parallel. 20kA maximum discharge current.

Accessories	
 <p>IP67</p>	

Notes:

¹ Lead times for CCT options other than BR and BL may be increased
 * IP67 upgrade for Engine + fan (only NL, 10D, 25D, 50D & 75D)