


Worlds only Bi-Level "Switchit" LED T8 lamp


Rental Program Available!

Contact info@globaltechled.com for more information

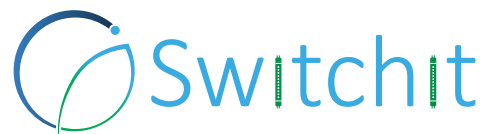

SPECIFICATION FEATURES & BENEFITS

- High output LED T8 lamp
- Installs in seconds.
- Customize light levels for low or high situations
- Compatible with a majority of emergency start fixtures
- Extends existing ballast life up to 10x of rated life.
- No fixture rewiring or new ballasts needed
- LUMENS: HI= 2200 / LO=1600
- Lamp Efficacy: 115 LPW
- PF: ≥95%
- THD: <20%

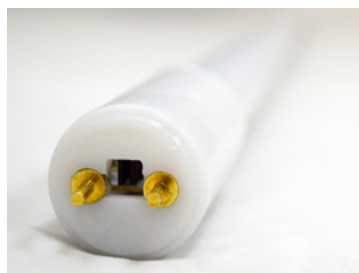

Wattage per Ballast Factor	Low Wattage Setting	High Wattage Setting
Low Ballast Factor .75	12W	18W
Normal Ballast Factor .88	14W	22W
Medium Ballast Factor 1.0	16W	26W
High Ballast Factor 1.2	20W	30W
Ballast Compatibility	Manufacturer Approved Electronic Rapid Start \ Instant Start \ Emergency	
Tombstone Compatibility	Shunted (Non Shunted must be bridged before installation)	
Chromaticity Data	Minimum CRI 80 Maximum CRI 95	
CCT	3000K, 4000K, 5000K	
L70 Lifespan	60,000 Hours	
Beam Angle	160 degrees	
Dimensions	47.2" - 1200mm / 1.02"- 26mm	
Weight	13oz.	
Limited Warranty	7 Years or 50,000 Hours	


Fully Compliant with ARRA Buy American Requirements. Made in the USA.



Switchit LED T8 Lamp

Ballast Compatible Fluorescent Replacement

Details

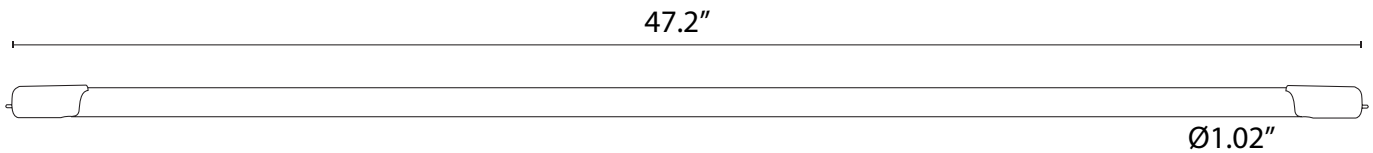

Ordering Code Example:
GTL - T8 - 48 - BR - C

Retrofit	Module	Length	Wattage		CCT	Lens
GTL	T8	48	HI		BR (5000K) [80CRI]	C = Clear
			LO		BL (4000K) [80CRI]	F = Frosted
					PR (3000K) [95CRI]	

Fully Compliant with ARRA Buy American Requirements. Made in the USA.